

Vertical Clamp Coupling™


The most adjustable vertical coupling is also the easiest to install




The **Vertical Clamp Coupling** is a major improvement over other standard vertical couplings. Using the patented Anderson Clamp Hub design, it eliminates all keys and 'clam shells' while giving the user the ability to easily change the position on the shaft as well as the amount of pump rotor lift.

Ideal Applications

Vertical pumps
Line shafting
Vertical turbines

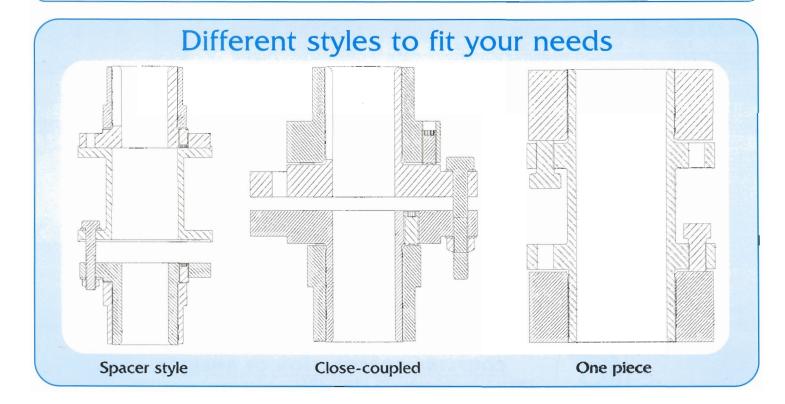


An Inside Look at the Vertical Clamp Coupling

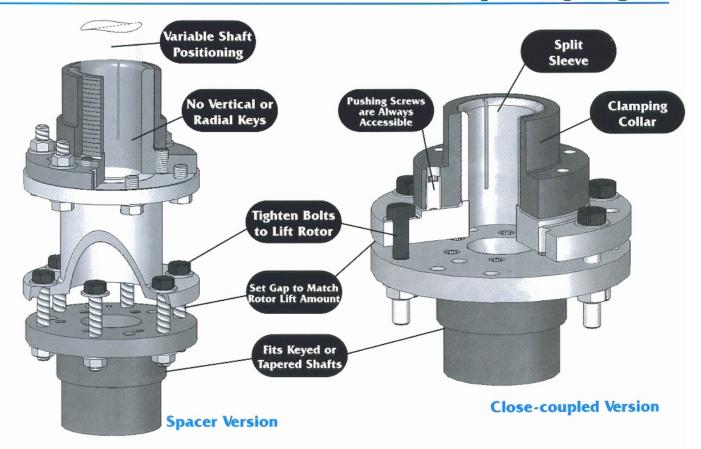

Dimensions and Engineering Data

| Size | Max Cont Torque (in-lb) | Peak Torque Capacity | Vertical Load Capacity | Total Weight (lbs) | WR ² (lb-in ²) | A OD (in)* | B Max Bore | C Min. Shaft Length |
|------|-------------------------------|----------------------------|------------------------------|--------------------------|--|------------------|------------------|------------------------------|
| | (111 112) | (in-lb) | (lb) | () | | | (in) | (in)* |
| 100 | 4,260 | 10,650 | 19,500 | 5.8 | 9.8 | 4.213 | 1.375 | 2.50 |
| 125 | 7,280 | 18,200 | 25,100 | 9.8 | 25.6 | 5.072 | 1.875 | 2.75 |
| 162 | 17,800 | 44,500 | 50,600 | 22.8 | 100.2 | 6.711 | 2.187 | 3.75 |
| 200 | 34,200 | 85,500 | 78,900 | 34.4 | 196 | 7.788 | 2.625 | 4.50 |
| 250 | 62,400 | 156,000 | 117,200 | 65.6 | 540 | 9.325 | 3.250 | 5.38 |
| 312 | 124,500 | 311,250 | 179,500 | 88 | 996 | 10.647 | 4.312 | 5.50 |
| 400 | 263,500 | 658,750 | 308,800 | 220 | 4,006 | 14.277 | 5.250 | 8.63 |
| 500 | 670,800 | 1,677,000 | 640,400 | 502 | 14,304 | 18.003 | 6.500 | 11.88 |
| 630 | 832,800 | 2,082,000 | 900,000 | 960 | 20,000 | To Suit | 8 | 14.00 |
| 800 | 1,656,000 | 4,140,000 | 1,200,000 | 1,900 | 80,000 | To Suit | 12 | 16.00 |
| 1000 | 3,284,400 | 8,211,000 | 1,800,000 | 3,800 | 280,000 | To Suit | 16 | 18.00 |
| 1250 | 6,416,400 | 16,041,000 | 2,400,000 | 7,400 | 4,000,000 | To Suit | 20 | 20.00 |
| 1620 | 12,931,200 | 32,328,000 | 2,800,000 | 14,400 | 16,000,000 | To Suit | 24 | 22.00 |
| 2000 | 26,604,000 | 66,510,000 | 3,200,000 | 28,000 | 56,000,000 | To Suit | 28 | 24.00 |
| 2500 | 51,324,000 | 128,310,000 | 3,600,000 | 44,000 | 80,000,000 | To Suit | 32 | 26.00 |

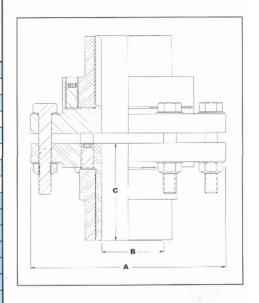

Values given are subject to change



COUPLING CORPORATION OF AMERICA

250 N Main St Jacobus PA 17407-1011 www.couplingcorp.com **800-394-3466 • 717-428-0570 • Fax 717-428-2865**

^{*}Hubs can be designed for shorter shafts and different A dimensions; consult CCA

Weight and inertia are given for maximum bore

Sizes larger than 500 are application specific, numbers listed are estimates